



VIESSMANN

WALL-MOUNTED GAS-FIRED CONDENSING BOILER

Outstanding performance, reliability and comfort

VITODENS 200-W, B2HA



Efficient and reliable
gas-fired wall-mounted
condensing boiler

B2HA – 71 to 530 MBH

GAS-FIRED CONDENSING TECHNOLOGY

▲ The Vitodens 200 offers outstanding performance, reliability and comfort in a massive range of residential or commercial applications. ▲



The Vitodens 200 W offers an ideal solution for residential or commercial applications.

The Vitodens 200 is your efficient and environmentally-friendly choice for an extensive range of applications. The low-emission MatriX cylinder burner guarantees clean, low-NOx combustion, while Lambda Pro ensures the highest efficiency at all times.

Efficient by design


At the core of the Vitodens 200 are the Viessmann stainless steel Inox-Radial heat exchanger and MatriX cylinder burner. Together, they allow the greatest amount of heat extraction to be achieved with minimal loss.

Intelligent combustion system

The Vitodens 200 is optimized for maximum performance with the intelligent Lambda Pro combustion management system, which automatically adapts combustion to changing gas qualities and operating conditions. This unique function becomes increasingly important as gas supplies vary in quality and heating value.

What is Lambda Pro?

By continuously monitoring the flame quality of the MatriX cylinder burner, the Lambda Pro combustion management system automatically adjusts the gas and combustion air ratio. Without any manual adjustments or conversions, the Vitodens 200, B2HA always maintains optimal performance.

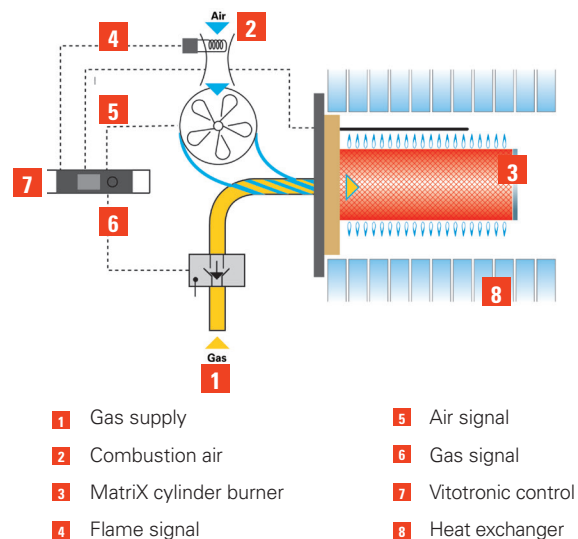

VITODENS 200-W


71-530 MBH

Your environmental choice

The Vitodens 200 is your efficient and environmentally friendly choice for all applications. The low-emission MatriX cylinder burner guarantees clean, low-NOx combustion, while Lambda Pro ensures the highest efficiency at all times. With the Vitodens 200, you can actively contribute to protecting the environment – and your wallet – without compromising your warmth and comfort.

Strength in numbers

As many as eight Vitodens 200 gas-fired condensing boilers can be combined in a single prefabricated cascade system, with inputs up to 4240 MBH. As a cascade system, the boilers are staged to meet fluctuating heating demands, it maintains maximum efficiency by precisely matching the load. A cascade system can also prevent interruption of heating plant operation, with multiple boilers available for back-up.

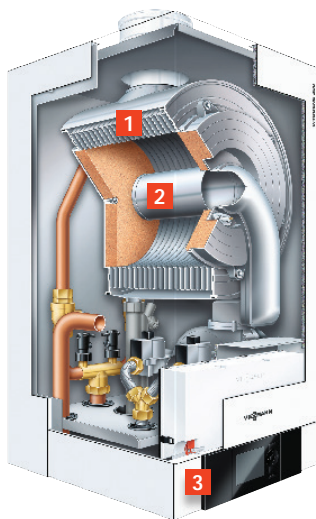

VITODENS 200-W

- 1 Inox-Radial heat exchanger
- 2 Modulating MatriX cylinder burner
- 3 Vitotronic 200 control with graphic user interface



Inox-Radial Heat Exchanger

Award winning control unit

The intuitive Viessmann made Vitotronic 200, HO1B control manages the entire heating system and maintains economical performance and maximum comfort for your home at all times. The user-friendly, menu-driven control is capable of displaying multi-line text and graphics on a back-lit display 70% larger than those of comparable units. The high contrast, monochrome display offers excellent readability, even under poor lighting conditions.

You're always in control with the Vitotrol App. It allows you to remotely operate your Viessmann heating system anytime, anywhere from your smartphone or tablet.


BENEFITS AT A GLANCE

- + Best value in its class with new industry-leading technology
- + 5 models from 71 to 530 MBH (single-boiler installation)
- + Low-emission combustion for environmentally-friendly operation
- + Intelligent Lambda Pro gas management system automatically adjusts to different gas qualities for optimum efficiency and performance
- + Modulation ratio up to 5:1 ensures extremely high efficiency
- + Flexibility of different venting pressure zones with combined lengths of up to 131 ft.
- + Common venting up to four boilers*
- + Suitable for altitude levels up to 10,000 ft/3000m.

* In accordance with local codes and regulations of jurisdiction authorities



Always be in control with the Vitotrol App.

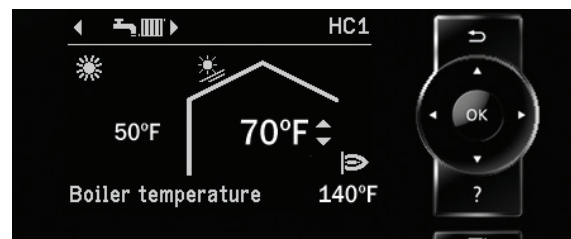

Vitotronic 200 control with Setup Wizard

Quality Guaranteed

Warranty information is available at
www.viessmann.ca/en/services/warranties.html



Technical Information

VITODENS 200-W


Viessmann Manufacturing
Company Inc.
Waterloo, ON Canada
(800) 387-7373
viessmann.ca

Viessmann Sales Office
Langley, BC Canada
(877) 853-3288

Model	B2HA	285	311	352	399	530
Min. Input (NG)*	MBH	71	71	71	113	113
Max. Input (NG)*	MBH	285	311	352	399	530
NET AHRI Rating (MBH)	MBH	226	254	286	323	426
AFUE	%	92				
Thermal Efficiency**	%		94.5	94.5	93.9	93.5
Dimension						
Width	in.	19	19	19	23.625	23.625
Height	in.	43.5	43.5	43.5	44.5	44.5
Depth	in.	21	21	21	27.1	27.1
Weight	lbs.	194	194	194	298	298
Boiler Water Content	USG	3.4	3.4	3.4	4.0	4.0
	L	12.8	12.8	12.8	15	15
Heat Exchanger Surface	ft ²	28.88	28.88	28.88	36.78	36.78
Max. Operating Pressure	psig	60	60	60	80	80
	bar	4	4	4	5.5	5.5
Min. Gas Supply Pressure						
Natural Gas	"w.c.	4	4	4	4	4
Liquid Propane Gas	"w.c.	10	10	10	10	10
Boiler Water Max. Temp.						
Space Heating (steady state)	°F	185	185	185	185	185
	(°C)	(85)	(85)	(85)	(85)	(85)
DHW Production	°F	185	185	185	185	185
	(°C)	(85)	(85)	(85)	(85)	(85)
Fixed High Limit	°F	210	210	210	210	210
	(°C)	(99)	(99)	(99)	(99)	(99)
Boiler Connections						
Boiler heating supply and return	NPTM"	1 ^{1/2}	1 ^{1/2}	1 ^{1/2}	2	2
Pressure relief valve	NPTF"	3/4	3/4	3/4	3/4	3/4
Drain valve	male thread	3/4	3/4	3/4	3/4	3/4
Boiler supply / return for indirect-fired DHW storage tank (field supplied)	NPT"	1 ^{1/2}	1 ^{1/2}	1 ^{1/2}	2	2
Gas valve connection	NPTF"	1	1	1	1	1

*Input based on natural gas

** ANSI Z21.13/CSA 4.9



Technical information subject to change without notice.
9441 034 - 03 09/2023 Printed in Canada